

**CONNETTORI SCHEDA-FILO PASSO 2.54MM**



**2541 Maschio dritto**

Codice Adimpex: **J2541402-R**

CONN. MS p2.54 EX2541WV-02P

Serie:2541-WV

p/n:254102WV054

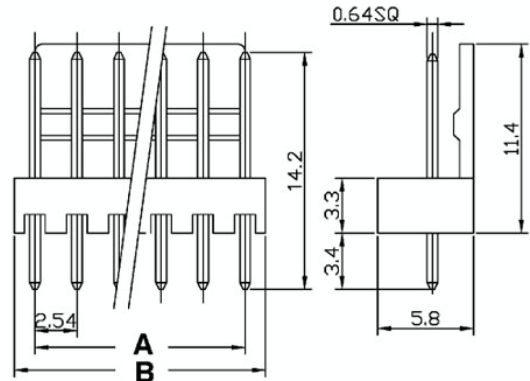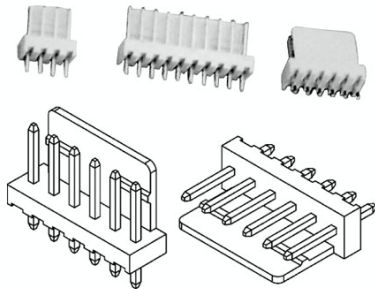

Dimensioni

$$A = 2.54 \times (n - 1)$$

$$B = A + 2.54$$

$$n = n^{\circ} \text{ contatti}$$

| Codice Adimpex  | n° Posizioni | Codice Adimpex | n° Posizioni |
|-----------------|--------------|----------------|--------------|
| <b>J2541402</b> | 2            | J2541409       | 9            |
| J2541403        | 3            | J2541410       | 10           |
| J2541404        | 4            | J2541411       | 11           |
| J2541405        | 5            | J2541412       | 12           |
| J2541406        | 6            | J2541413       | 13           |
| J2541407        | 7            | J2541414       | 14           |
| J2541408        | 8            | J25414xx       | xx (02÷20)   |

**CARATTERISTICHE**

- Passo: 2.54mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-2 Colore beige
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -25°C ÷ 105°C

**FEATURES**

- Pitch: 2.54mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-2 Beige color
- Male pins: brass, tin plated
- Operating temperature range: -25°C ÷ 105°C

